
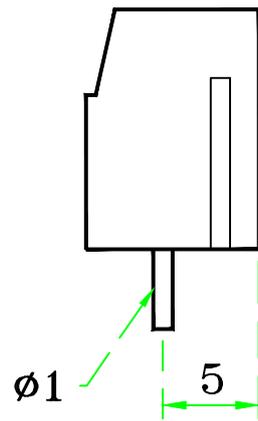
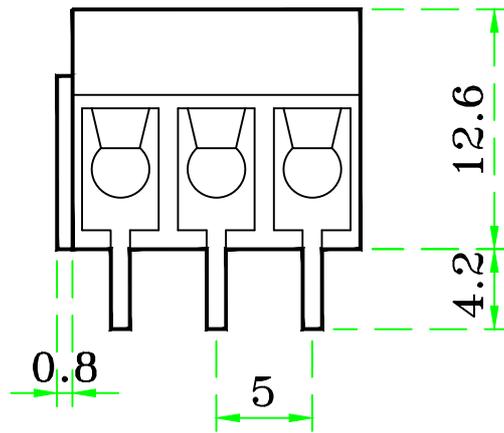


Current rating	AC250V 10Amp
Insulation resistance	500M Ohms of More at DC500V
Withstand voltage	AC1000V/Minute
Wire range	AWG #14~#22
Torque	4.0lb-in

5			
4	Screw	Steel	M3
3	Wire protector	Phosphor bronze	
2	Terminal	Brass	Tin
1	Base	PBT	BLUE
	Part Name	Material	Plating
			Remark

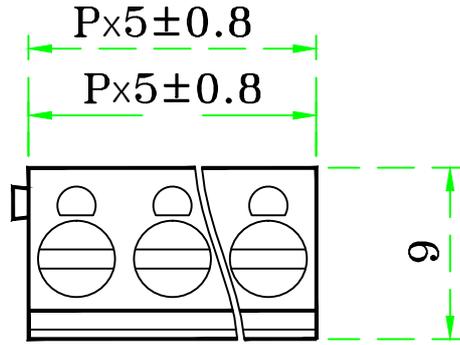

PCB hole Dia :  $\phi 1.3$

(2P & 3P Assemble)

**Note.**

1. 지시하지 않은 공차: **GENERAL TOLERANCES**

GENERAL TOLERANCES			Part Name.		MOEDL No.	
0 ~ 10	±0.2		Terminal Block		BI-500BS-DG300-*P	
11 ~ 50	±0.5		SIZE		Drawing BY.	Approval BY.
51 ~ 100	±0.8		A4	Sheet No.		
Scale /			UNIT	(주)부일일렉트로닉스 BUIL ELECTRONICS CO.,LTD www.ebuild.com		
Material			mm			
Finish						