
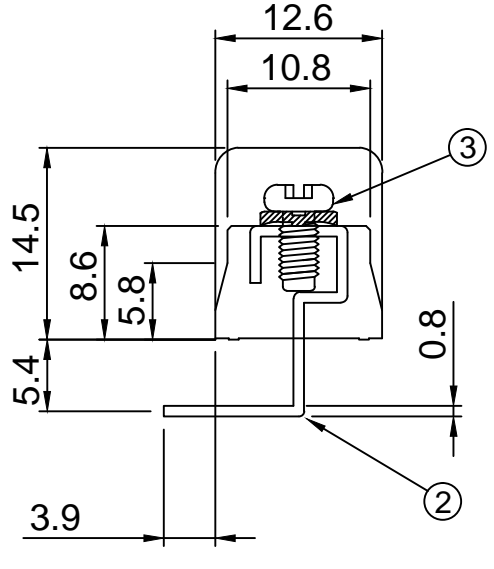
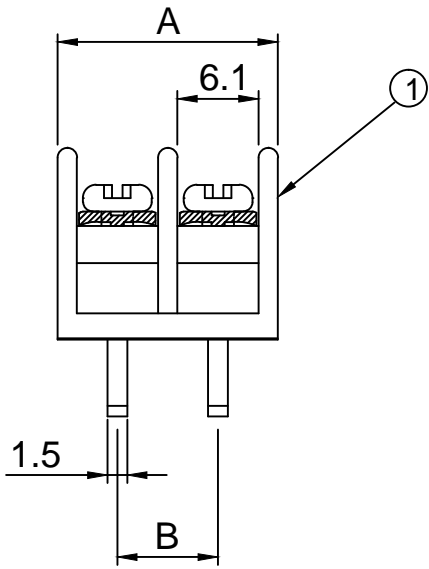


No.	COMPONENT PARTS	MATERIAL	STANDARD	PLATED	COLOR	Q'TY	REMARK
4							
3	Screw	Steel		Nickel		M3	
2	Terminal	Brass	1/2H	TIN		0.8t	
1	Base	PBT	UL94V-0		Black		

3	4
Current rating	AC250V 10Amp
Insulation resistance	500M Ohms of More at DC500V
Withstand voltage	AC2000V/Minute
Wire range	AWG #18~#26
Torque	5.2 lb-in

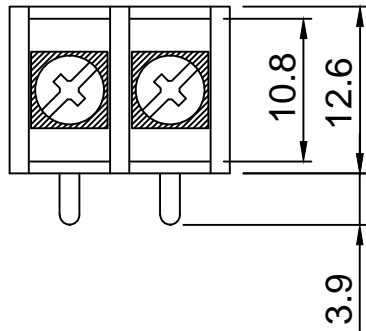

PCB hole Dia:  $\phi 1.8$

Note.  
 \*Option: Brass Screw  
 \* 밴딩하면 핀 폭이 좁아서 옆으로 약간 기울어짐

Pin	2	3	4	5	6	7	8	9	10	11	12	13	~
<b>A<math>\pm 0.8</math></b>	16.74	24.36	31.98	39.63	47.22	54.84	62.46	70.08	77.7	85.32	92.94	100.56	+7.62 ~
<b>B<math>\pm 0.5</math></b>	7.62	15.24	22.86	30.48	38.1	45.72	53.34	60.96	68.58	76.2	83.82	91.44	+7.62 ~

GENERAL TOLERANCES		Part Name.	Dwg No.	
0 ~ 50	$\pm 0.5$	Terminal Block	BI-762C-BL2-**P	
50 ~ 100	$\pm 0.8$			
100 ~ 150	$\pm 1.0$	Drawing BY.	Checkd BY.	Approval BY.
150 ~ 200	$\pm 1.5$			
Scale	/	Sheet No. of		
Material		(주) 부일일렉트로닉스 BUIL ELECTRONICS CO., LTD ( www.ebuil.com )		