

4							
3	Screw	Steel		Nickel			M3
2	Terminal	Brass	1/2H	TIN			0.8t
1	Base	PBT	UL94V-0		Black		
No.	COMPONENT PARTS	MATERIAL	STANDARD	PLATED	COLOR	Q*TY	REMARK




Current rating	AC250V 10Amp
Insulation resistance	500M Ohms of More at DC500V
Withstand voltage	AC2000V/Minute
Wire range	AWG #18~#26
Torque	5.2 lb-in

(Option)

* Brass Screw

* Cover: PC투명.

적용시 모델번호 뒤에 "C" 추가

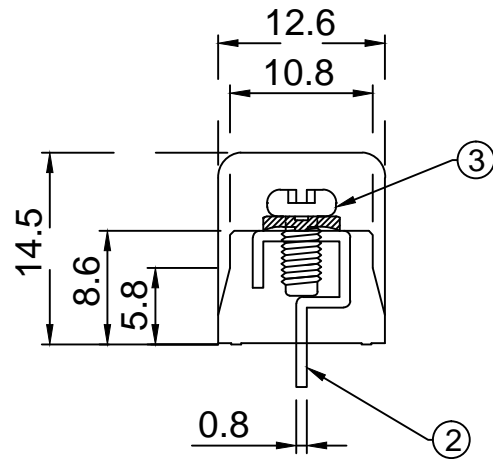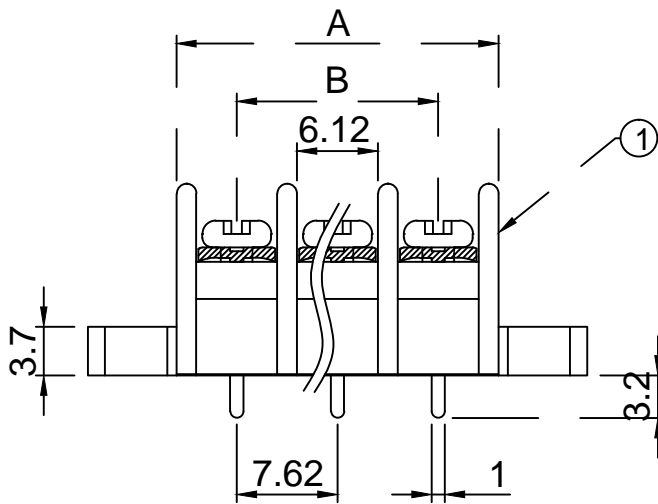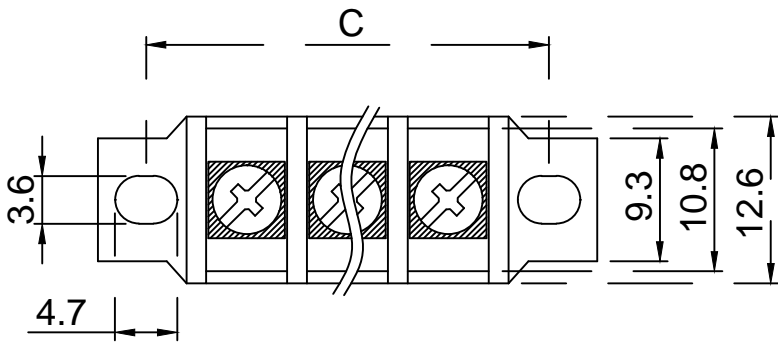

PCB hole Dia: $\phi 1.4$

Pin	2	3	4	5	6	7	8	9	10	11	12	13	~
A ± 0.8	16.74	24.36	31.98	39.63	47.22	54.84	62.46	70.08	77.7	85.32	92.94	100.56	+7.62 ~
B ± 0.5	7.62	15.24	22.86	30.48	38.1	45.72	53.34	60.96	68.58	76.2	83.82	91.44	+7.62 ~
B ± 0.8	22.84	30.46	38.08	45.7	53.32	60.94	68.56	76.18	83.8	91.42	99.04	106.66	+7.62 ~

GENERAL TOLERANCES		Part Name.		Dwg No.	
0 ~ 50	± 0.5	Terminal Block		BI-762C-BD-**P	
50 ~ 100	± 0.8				
100 ~ 150	± 1.0	Drawing BY.		Sheet No.	
150 ~ 200	± 1.5	Checkd BY.		of	
Scale	/	Approval BY.		(주)부일일렉트로닉스 BUIL ELECTRONICS CO., LTD. (www.ebuil.com)	
Material					