
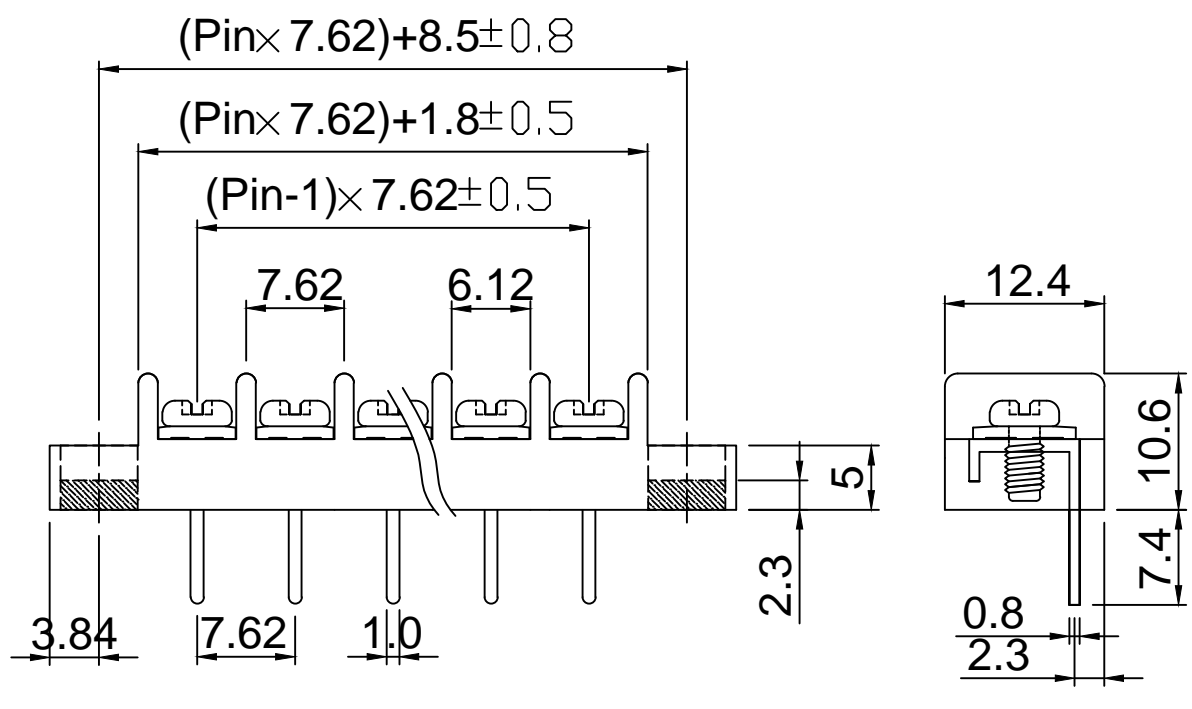


4								Current rating	AC250V 10Amp
3	Screw	Steel		Nickel			M3	Insulation resistance	500M Ohms of More at DC500V
2	Terminal	Brass	1/2H	TIN			0.8t	Withstand voltage	AC2000V/Minute
1	Base	PBT	UL94V-0		Black			Wire range	AWG #18~#26
No.	COMPONENT PARTS	MATERIAL	STANDARD	PLATED	COLOR	Q"TY	REMARK	Torque	5.2 lb-in

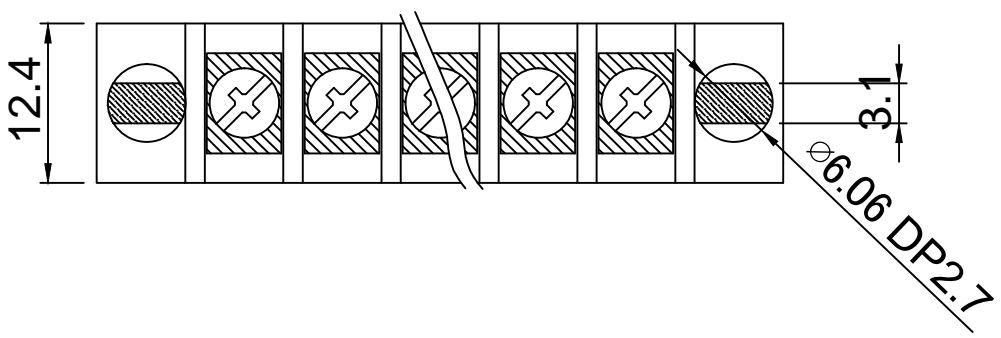

PCB hole Dia: $\phi 1.4$

GENERAL TOLERANCES			Part Name.		Dwg No.	
0 ~ 50	± 0.5		Terminal Block		BI-762C-1SF-**P	
50 ~ 100	± 0.8					
100 ~ 150	± 1.0					
150 ~ 200	± 1.5					
Scale /			Drawing BY.	Checkd BY.	Approval BY.	Sheet No. of
Material			(주) 부일일렉트로닉스 BUIL ELECTRONICS CO., LTD. (www.ebuil.com)			