
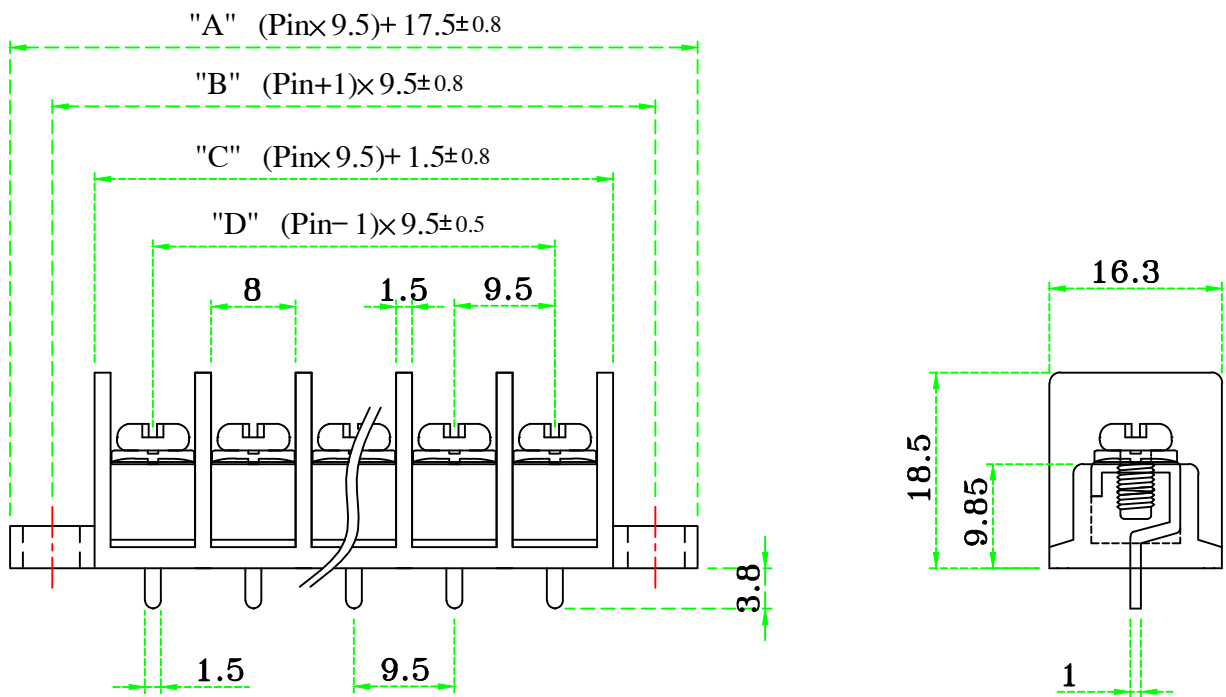


4					Current rating	AC250V 18Amp
3	Screw	Steel	Ni	M3.5	Insulation resistance	1000M Ohms of More at DC500V
2	Terminal	Brass	TIN	1/2H	Withstand voltage	AC2000V/Minute
1	Base	PBT		UL94 V0	Wire range	AWG #14~22
A	Part Name	Material	Plating	Remark	Torque	6.9 lb-in

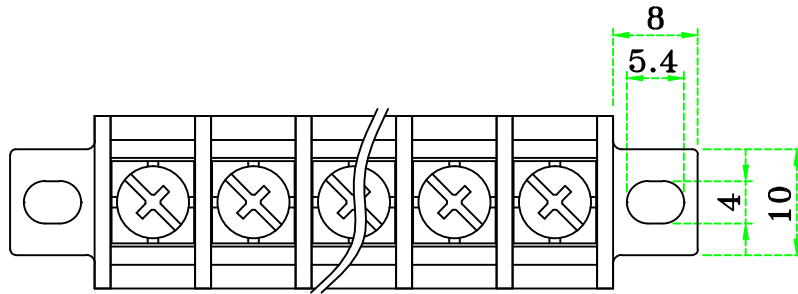

PCB hole Dia: $\phi 2.0$

Option.

- 1. Cover 사용시 No.: BI-95ADC-*P

Note.

- 1. 지시하지 않은 공차: GENERAL TOLERANCES

GENERAL TOLERANCES			Part Name.		Dwg No.	
0 ~ 50	±0.5	±1.5°	Terminal block		BI-95AD-*P	
50 ~ 100	±0.8		Drawing BY.		Checkd BY.	
100 ~ 150	±1.0		Approval BY.		Sheet No.	
150 ~ 200	±1.2		of			
Scale	/			(주)부일일렉트로닉스 BUIL ELECTRONICS CO., LTD. www.ebuil.com		
Materral						
Finish						