
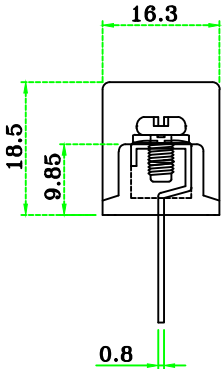
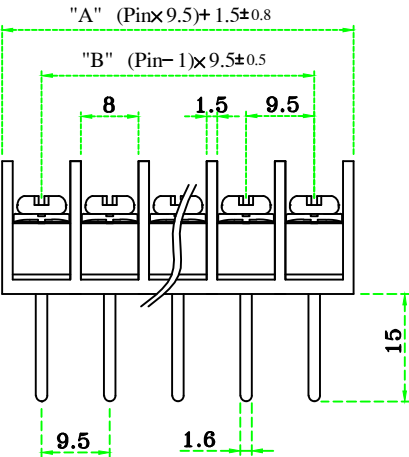


1					2		3		4	
A	4					Current rating	AC250V 10Amp			
	3	Screw	Steel	Ni	M3.5	Insulation resistance	1000M Ohms of More at DC500V			
	2	Terminal	Brass	TIN	1/2H	Withstand voltage	AC2000V/Minute			
	1	Base	PBT		UL94 V0	Wire range	AWG #14~22			
		Part Name	Material	Plating	Remark	Torque	6.9 lb-in			
										A

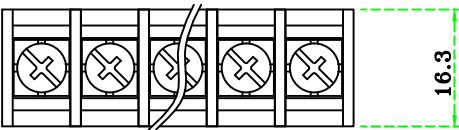

PCB hole Dia: ø2.0

Option.
1. Cover사용시 모델No. : BI-95A-1SC(0.8t)-*P

Note.
1. 지시하지 않은 공차: GENERAL TOLERANCES

GENERAL TOLERANCES				Part Name. Terminal block		Dwg No. BI-95A-1S(0.8t)-* P			
0 ~ 50	±0.5								
50 ~ 100	±0.8								
100 ~ 150	±1.0								
150 ~ 200	±1.2								
Scale /				Drawing BY.	Checkd BY.	Approval BY.	Sheet No.	of	
Materral							(주)부일일렉트로닉스 BUIL ELECTRONICS CO., LTD. www.ebuild.com		
Finish									
1				2		3		4	