
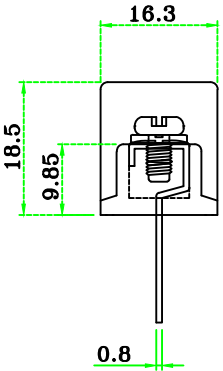
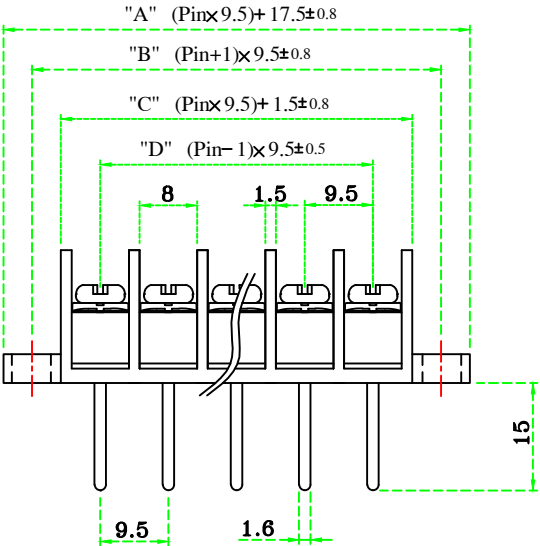


1					2		3		4	
4						Current rating	AC250V 10Amp			
3	Screw	Steel	Ni	M3.5		Insulation resistance	1000M Ohms of More at DC500V			
2	Terminal	Brass	TIN	1/2H		Withstand voltage	AC2000V/Minute			
1	Base	PBT		UL94 V0		Wire range	AWG #14~22			
A	Part Name	Material	Plating	Remark		Torque	6.9 lb-inA			

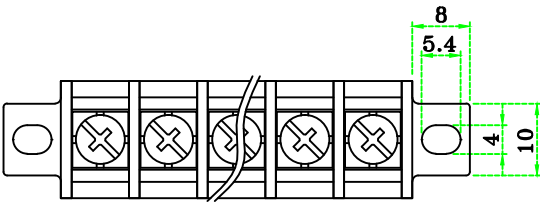

PCB hole Dia: $\varnothing 2.0$

Option.

1. Cover사용시 모델No. : BI-95A-1SDC(0.8t)-*P

Note.

1. 지시하지 않은 공차: GENERAL TOLERANCES

GENERAL TOLERANCES				Part Name. Terminal block		Dwg No. BI-95A-1SD(0.8t)-* P			
0 ~ 50	±0.5		Drawing BY.			Checkd BY.	Approval BY.	Sheet No.	of
50 ~ 100	±0.8							(주)부일일렉트로닉스 BUIL ELECTRONICS CO., LTD. www.ebuil.com	
100 ~ 150	±1.0								
150 ~ 200	±1.2								
Scale		/							
Materral									
Finish									
1				2		3		4	