

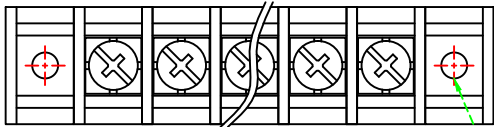


1					2		3		4		
A	4						Current rating	AC250V 10Amp			
	3	Screw	Steel	Ni	M3.5		Insulation resistance	1000M Ohms of More at DC500V			
	2	Terminal	Brass	TIN	1/2H		Withstand voltage	AC2000V/Minute			
	1	Base	PBT		UL94 V0		Wire range	AWG #14~22			
		Part Name	Material	Plating	Remark		Torque	6.9 lb-in			
							A				

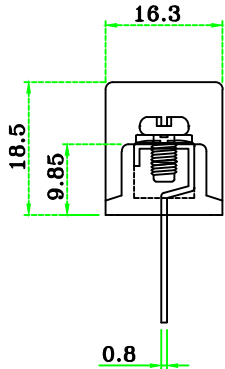

ø3.6

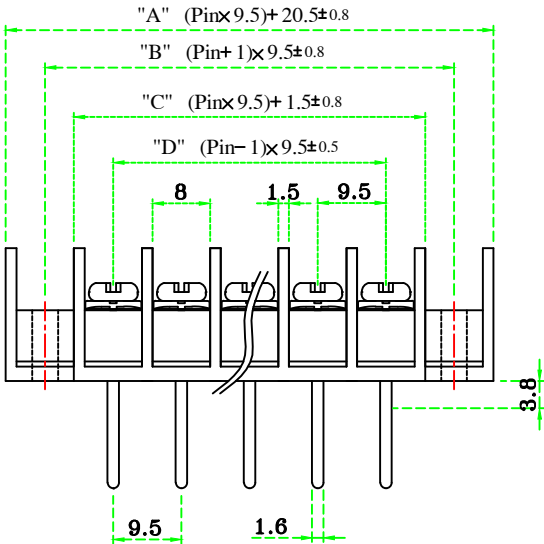

PCB hole Dia: ø2.0

Option.

1. Cover사용시 모델No. : BI-95A-1SFC(0.8t)-*P

Note.

1. 지시하지 않은 공차: GENERAL TOLERANCES

GENERAL TOLERANCES				Part Name. Terminal block		Dwg No. BI-95A-1SF(0.8t)-* P									
0 ~ 50	±0.5	 ±1.5°	Drawing BY.			Checkd BY.		Approval BY.		Sheet No.		of			
50 ~ 100	±0.8								(주)부일일렉트로닉스 BUIL ELECTRONICS CO., LTD. www.ebuild.com						
100 ~ 150	±1.0														
150 ~ 200	±1.2														
Scale			/												
Materral															
Finish															
1				2				3				4			