


4				
3	Screw	Steel	Ni	M3.5
2	Terminal	Brass	TIN	1/2H
1	Base	PBT		UL94V0
A	Part Name	Material	Plating	Remark

Current rating	AC250V 10Amp
Insulation resistance	1000M Ohms of More at DC500V
Withstand voltage	AC2000V/Minute
Wire range	AWG #12~22
Torque	6.9 lb-in

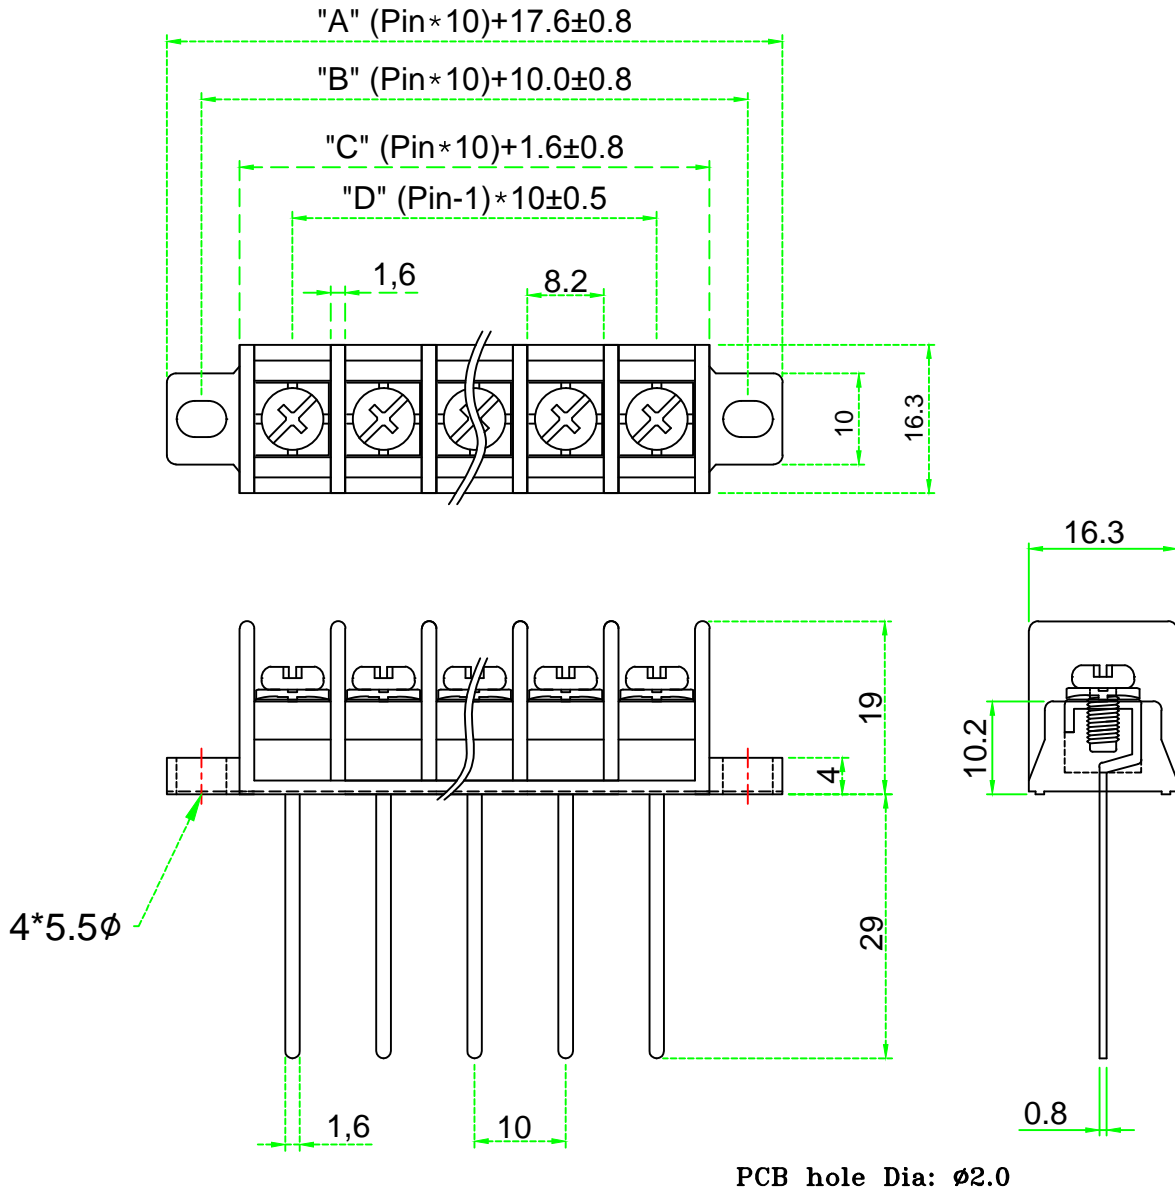

**Note.**

1. **One Mold** 최대 핀수: 18Pin
2. **Cover** 사용시 모델No. : BI-10A-2SDC-\*P\_(Option)
3. 지시하지 않은 공차: **GENERAL TOLERANCES**

GENERAL TOLERANCES		Part Name.	Dwg No.			
0 ~ 50	±0.3	<b>Terminal block</b>	<b>BI-10A-2SD-*P</b>			
50 ~ 100	±0.5					
100 ~ 150	±0.8					
150 ~ 200	±1.0					
Scale	/	Drawing BY.	Checkd BY.	Approval BY.	Sheet No.	of
Materral					(주)부일일렉트로닉스 BUIL ELECTRONICS CO., LTD. www.ebuil.com	
Finish						