


4				
3	Screw	Steel	Ni	M3.5
2	Terminal	Brass	TIN	1/2H
1	Base	PBT		UL94V0
A	Part Name	Material	Plating	Remark

3	Current rating	AC250V 15Amp
	Insulation resistance	1000M Ohms of More at DC500V
	Withstand voltage	AC2000V/Minute
	Wire range	AWG #12~22
	Torque	6.9 lb-in

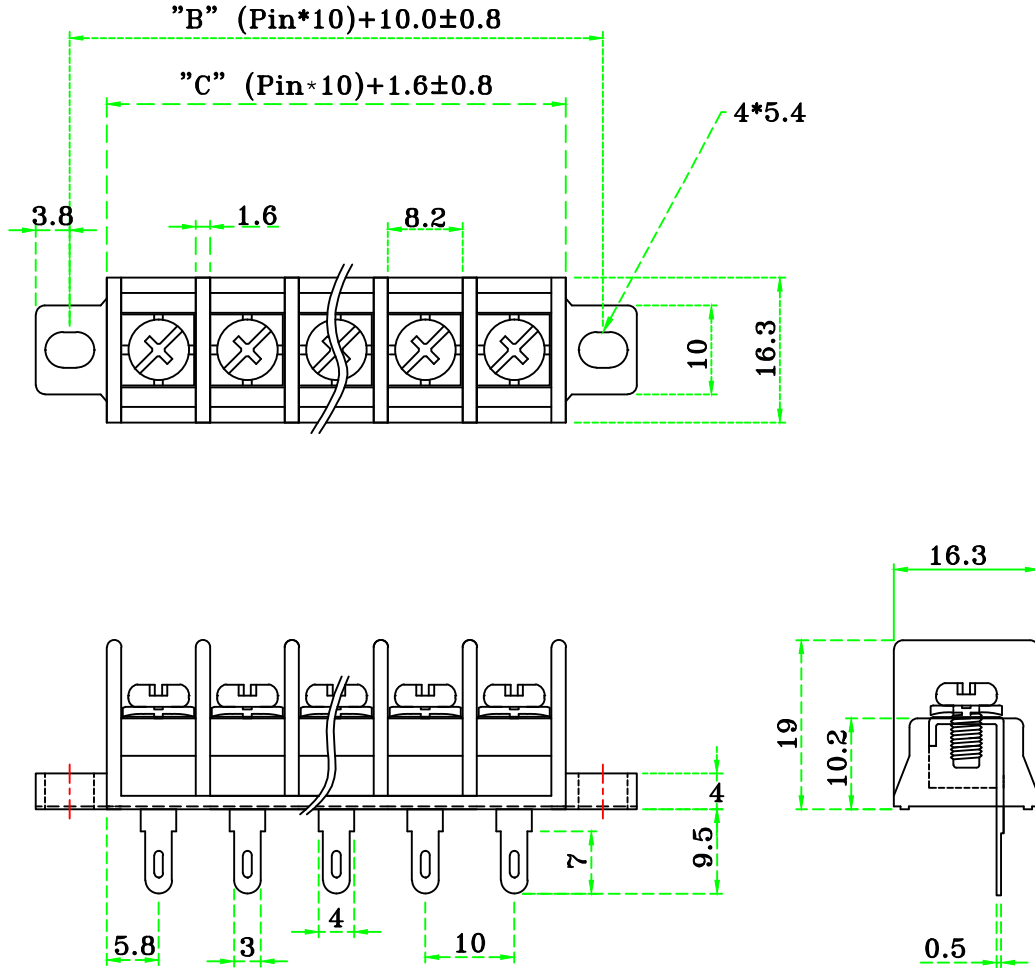

<110REC 삼입용>

Note.

1. 지시하지 않은 공차: GENERAL TOLERANCES

(Dimension)

Pin	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
B±0.8	30	40	50	60	70	80	90	100	110	120	130	140	150	160	170	180	190
C±0.8	21.6	31.6	41.6	51.6	61.6	71.6	81.6	91.6	101.6	111.6	121.6	131.6	141.6	151.6	161.6	171.6	181.6

GENERAL TOLERANCES		Part Name.		Dwg No.	
0 ~ 50	±0.5	Terminal block		BI-10A-TRD-*P	
50 ~ 100	±0.8				
100 ~ 150	±1.0				
150 ~ 200	±1.2				
Scale /		Drawing BY.		Approval BY.	
Material		Checkd BY.		Sheet No. of	
Finish					
		(주)부일일렉트로닉스 BUIL ELECTRONICS CO., LTD. www.ebuil.com			