


	1		2		3		4
4					Current rating	AC250V 10Amp	
3	Screw	Steel	Ni	M3.5	Insulation resistance	1000M Ohms of More at DC500V	
2	Terminal	Brass	TIN	1/2H	Withstand voltage	AC2000V/Minute	
1	Base	PBT		UL94 V-0	Wire range	AWG #14~#22	
A	Part Name	Material	Plating	Remark	Torque	6.9 lb-in	

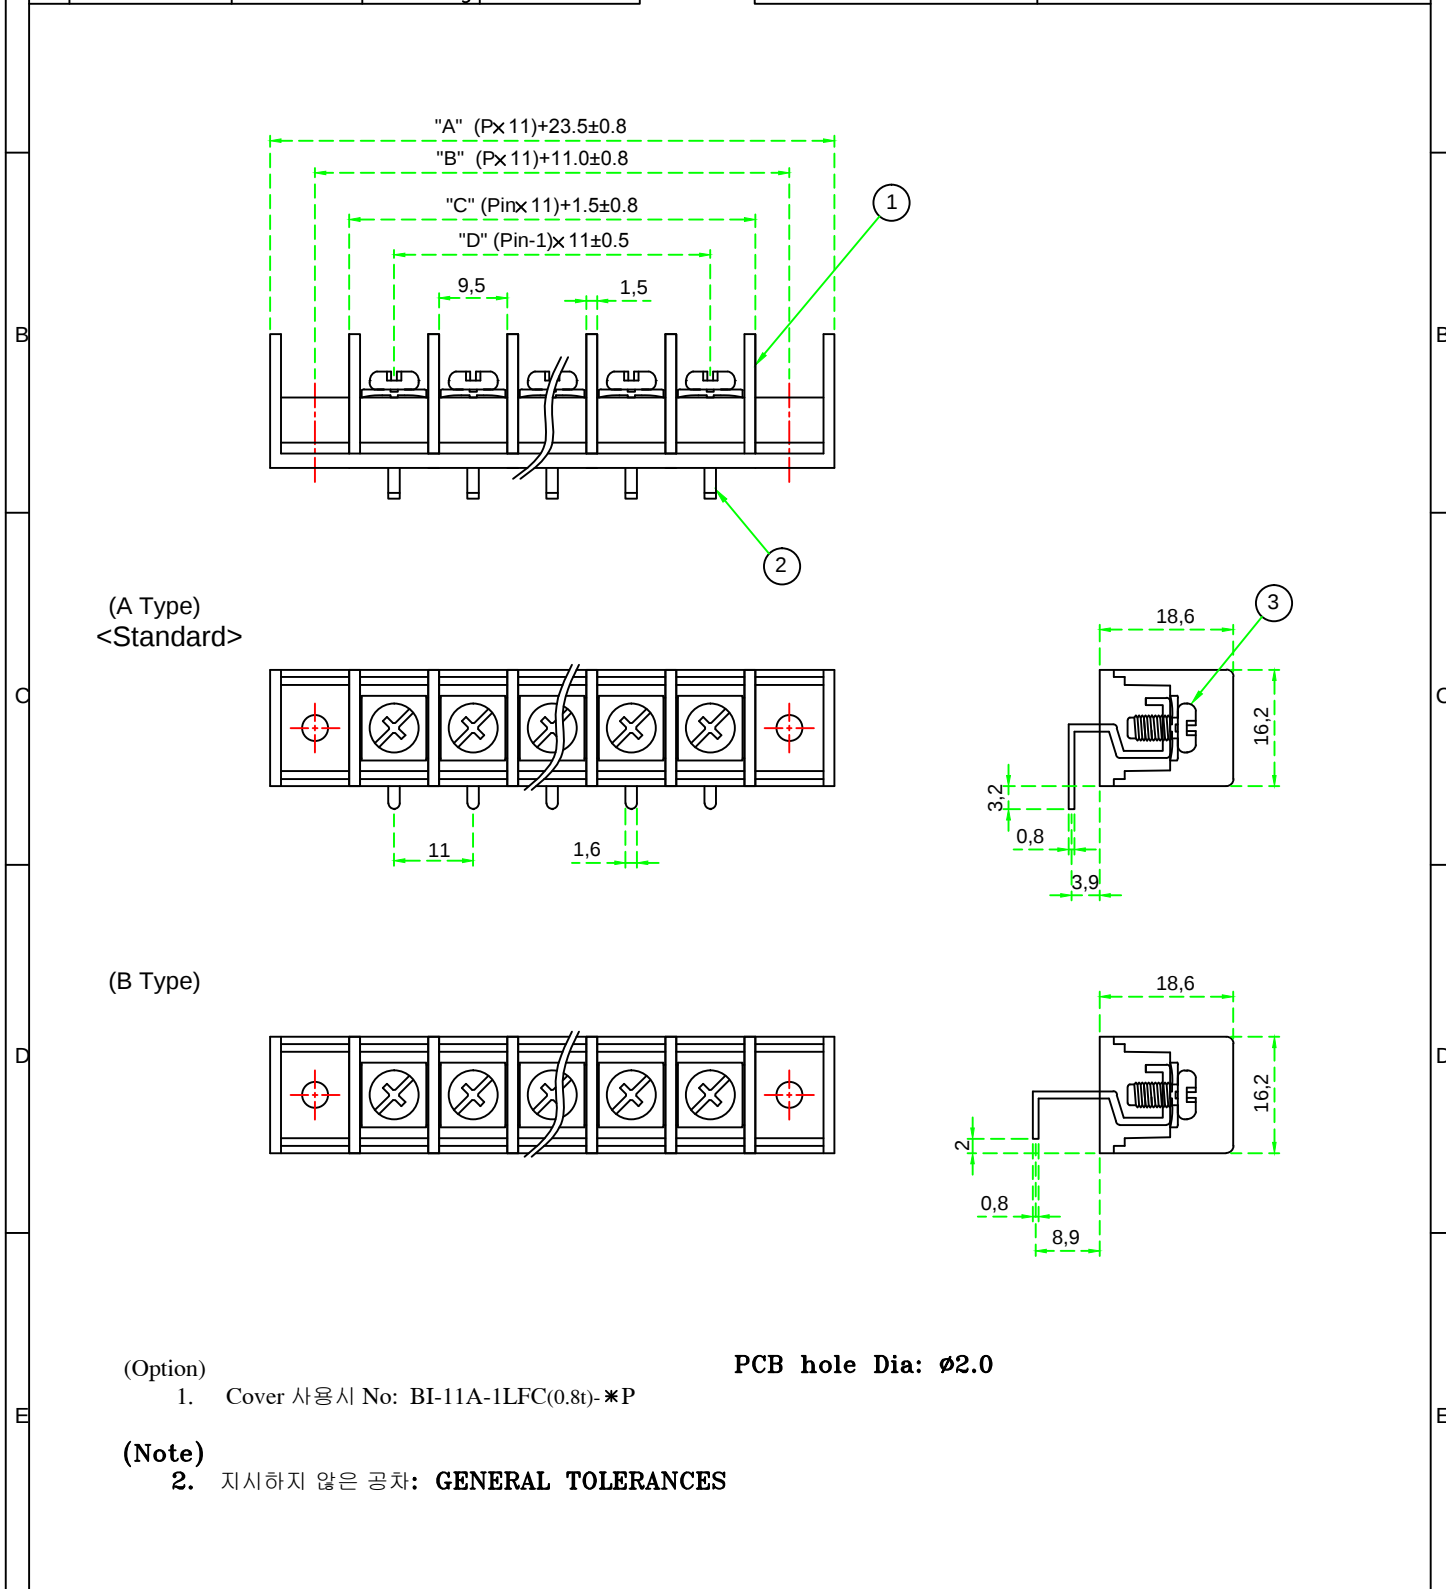

GENERAL TOLERANCES			Part Name.		Dwg No.	
0 ~ 50	±0.5		Terminal block		BI-11A-1LF(0.8t)-* P	
50 ~ 100	±0.8					
100 ~ 150	±1.0					
150 ~ 200	±1.2					
Scale	/		Drawing BY.	Checkd BY.	Approval BY.	Sheet No.
Materral						of
Finish						

(주)부일일렉트로닉스
 BUIL ELECTRONICS CO., LTD.
 www.ebuil.com