


| | | | | | | | |
|-----|-----------------|----------|----------|--------|-------|------|--------|
| | 1 | | | | 2 | | |
| 4 | | | | | | | |
| 3 | Screw | Steel | | Nickel | | | M4 |
| 2 | Terminal | Brass | 1/2H | TIN | | | 1t |
| 1 | Base | PBT | UL94V-0 | | Black | | |
| No. | COMPONENT PARTS | MATERIAL | STANDARD | PLATED | COLOR | Q'TY | REMARK |

| | |
|-----------------------|------------------------------|
| 3 | 4 |
| Current rating | AC250V 30Amp |
| Insulation resistance | 1000M Ohms of More at DC500V |
| Withstand voltage | AC2000V/Minute |
| Wire range | AWG #10~18 |
| Torque | 12lb-in(13.8kgf·cm) |

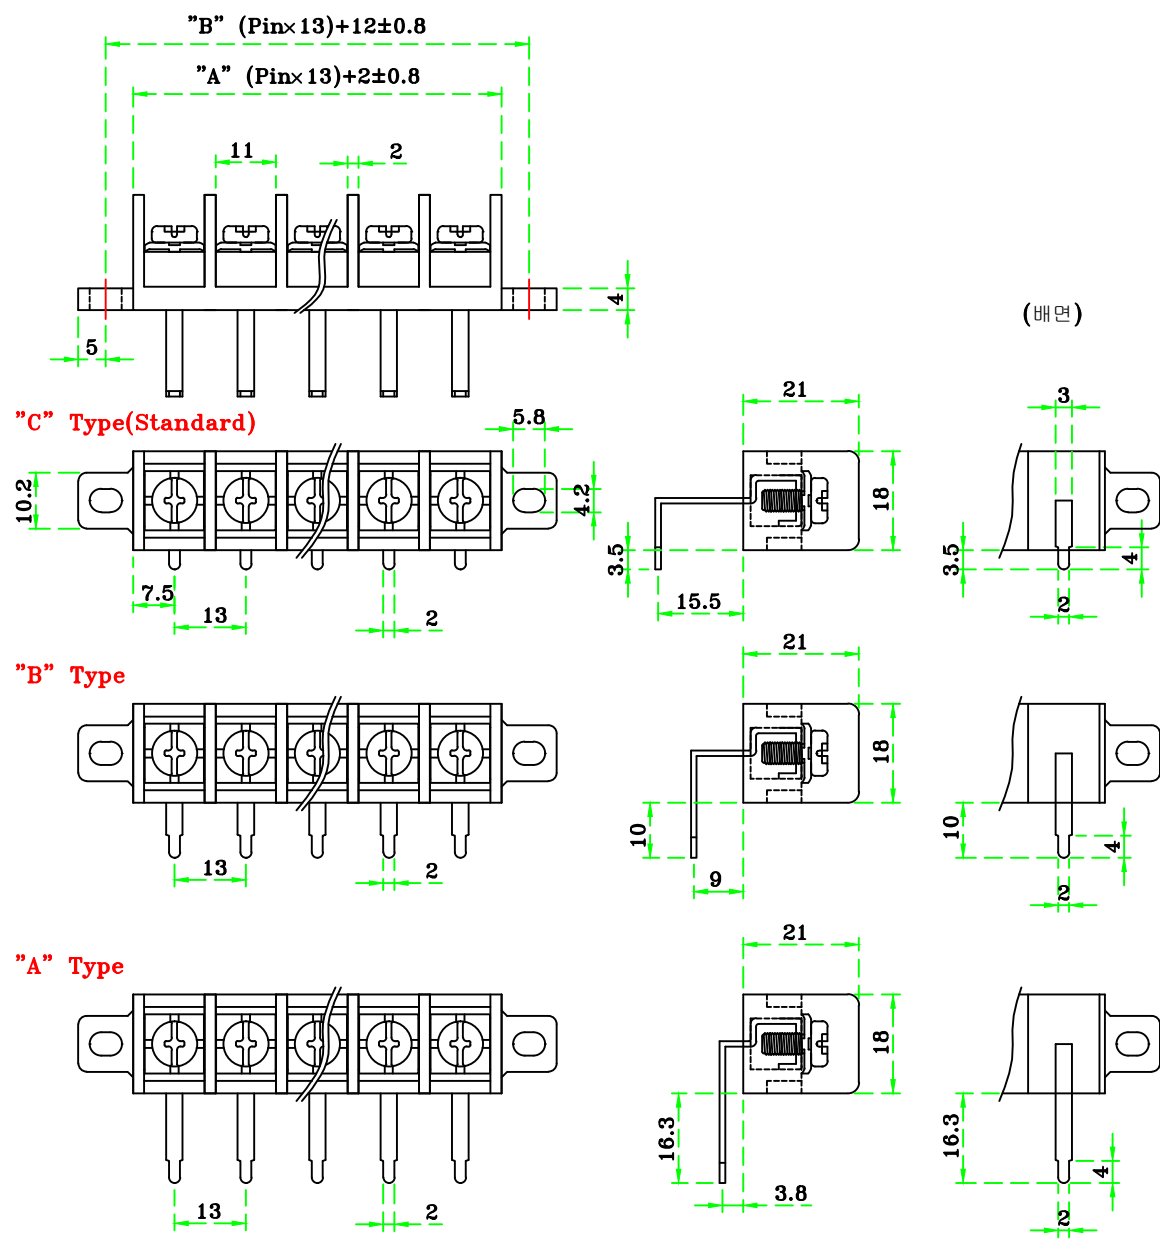

(Option) 1. Cover 사용시 No. : BI-13A-2LDC-*P
 (Note) 1. 지시하지 않은 공차: GENERAL TOLERANCES

(Dimension)

| | | | | | | | | | | | | | | | | | | | |
|-------|----|----|----|----|----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| Pin | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 |
| A±0.8 | 28 | 41 | 54 | 67 | 80 | 93 | 106 | 119 | 132 | 145 | 158 | 171 | 184 | 197 | 210 | 223 | 236 | 249 | 262 |
| B±0.5 | 38 | 51 | 64 | 77 | 90 | 103 | 116 | 129 | 142 | 155 | 168 | 181 | 194 | 207 | 220 | 233 | 246 | 259 | 272 |

| | | | | | | | | |
|--------------------|----------------|--|--|----------------|------------|---------------|--|----|
| GENERAL TOLERANCES | 0 ~ 50 ±0.5 | | | Part Name. | Dwg No. | | | |
| | 50 ~ 100 ±0.8 | | | Terminal Block | | BI-13A-2LD-*P | | |
| | 100 ~ 150 ±1.0 | | | Drawing BY. | Checkd BY. | Approval BY. | Sheet No. | of |
| | 150 ~ 200 ±1.5 | | | | | | | |
| Scale | / | | | | | | | |
| Material | | | | | | | | |
| | | | | | | | (주)부일일렉트로닉스 BUIL ELECTRONICS CO., LTD. www.ebuil.com | |