


Current rating	AC250V 20Amp
Insulation resistance	1000M Ohms of More at DC500V
Withstand voltage	AC2000V/Minute
Wire range	AWG #14~22

4				
3	Screw(SEMS)	Steel	Ni	M3.5*7
2	Terminal	BRASS	Ni	2T
1	Base	ABS_내열	BLACK	UL94_HB
	Part Name	Material	Plating	Remark

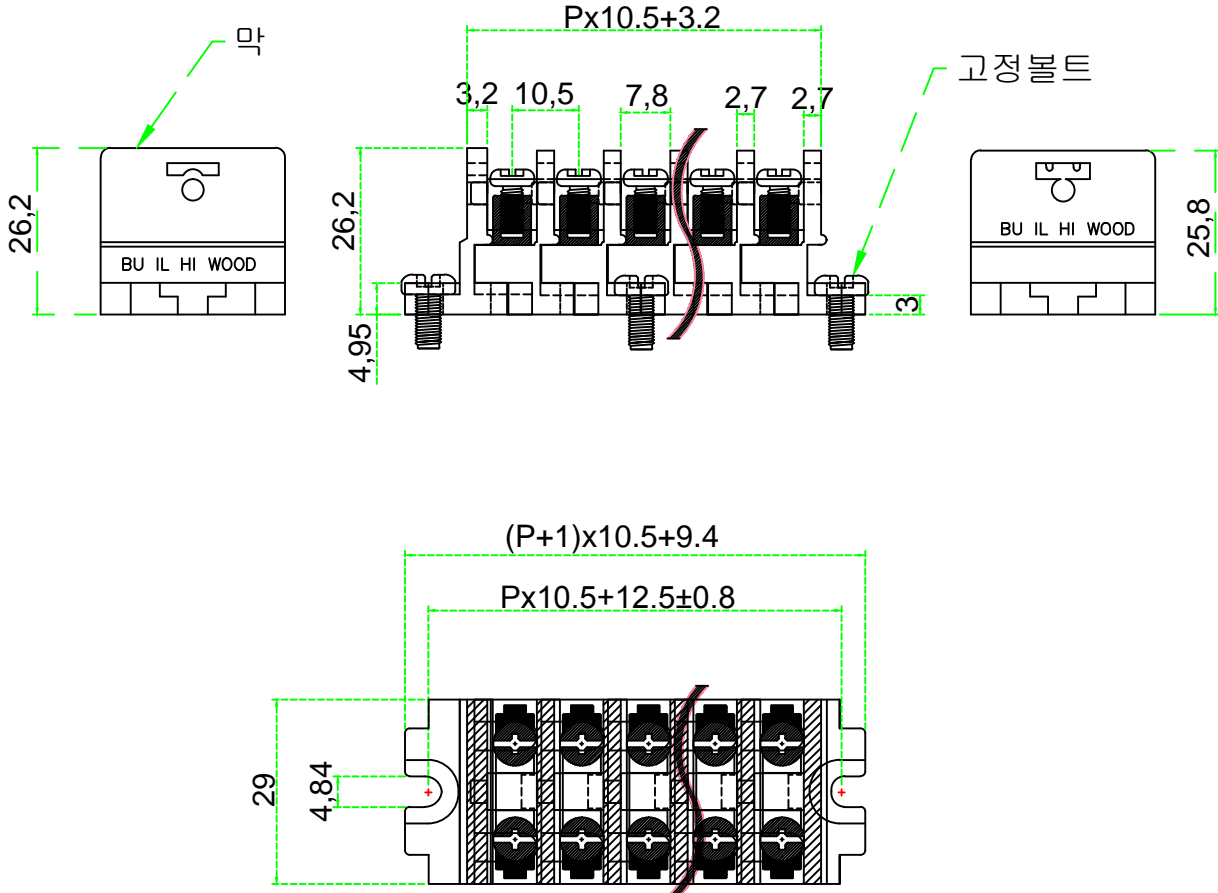

- * 몸체와 단자가 분리된 상태로 납품
- * 고정볼트는 제공안됨
- * 판넬에 고정시 5P 이상은 중앙에도 고정
- * "흑색"만 기본생산_(회, 황, 적은 MOQ 2,000pin)

GENERAL TOLERANCES		Part Name.		Dwg No.	
0 ~ 50	±0.3	Terminal block		BI-PAN20A-***P	
50 ~ 400	±0.5				
400 ~ 1000	±0.7	Drawing BY.	Checkd BY.	Approval BY.	Sheet No.
1000 ~ 3000	±0.9				of
Scale	/	(주)부일일렉트로닉스 BUIL ELECTRONICS CO., LTD. www.ebuil.com			
Material					
Finish					